CASA ÁNGEL · CUBIERTA · ESTRUCTURA DEL TECHO INCLINADO

Estructura del techo 1:75

Referencias


VC: vigas LVL 6×20 (cumbreras, limatesas, portantes) · a verificar por calculista
VP: cabios LVL 5×15 c/0,96 (antes 3×10)
CR: listones LVL 2,5×5
CU-02: modelada en R29 (12 cabios + VC-35..37)
Clavaderas 5×7,5 sobre cabios; contraclavaderas 2,5×5

Cabios por cubierta

CU-01 · 61 cabios · luz máx. 3,40
CU-02 · 12 cabios · luz máx. 2,46
CU-03 · 40 cabios · luz máx. 3,40

Vigas VC

VC-01 15,50 ml
VC-02 4,25 ml
VC-03 3,36 ml
VC-04 12,89 ml
VC-05 0,75 ml
VC-06 3,36 ml
VC-07 8,00 ml
VC-08 2,39 ml
VC-09 4,25 ml
VC-10 4,37 ml
VC-11 7,78 ml
VC-12 6,05 ml
VC-13 6,04 ml
VC-14 3,99 ml
VC-15 3,99 ml
VC-16 2,00 ml
VC-17 3,43 ml
VC-18 3,58 ml
VC-19 3,36 ml
VC-20 3,36 ml
VC-21 13,05 ml
VC-22 3,13 ml
VC-23 3,61 ml
VC-24 9,03 ml
VC-25 9,00 ml
VC-26 8,76 ml
VC-27 9,00 ml
VC-28 3,94 ml
VC-29 3,94 ml
VC-30 2,80 ml
VC-31 2,80 ml
VC-32 5,09 ml
VC-33 2,80 ml
VC-34 2,80 ml
VC-35 3,99 ml
VC-36 2,39 ml
VC-37 3,99 ml

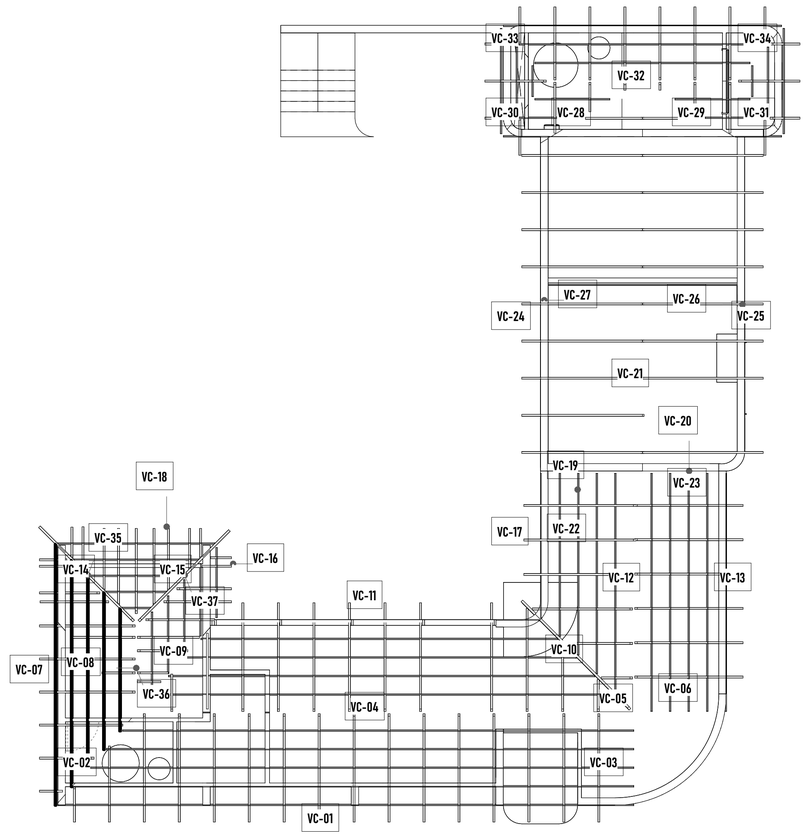

VC 6×20 · cabios VP 5×15 c/0,96 · listones CR 2,5×5 · CU-02 incluido

Cubierta R30 (archivo de documentación con el modelo principal vinculado). Paquete modelado: teja 20 · cámara ventilada 25 (contraclavaderas) · membrana respirable · EPS 75 entre clavaderas · barrera de vapor · machimbre 3/4" visto. Cabios LVL 5×15 c/0,96; vigas VC LVL 6×20 a verificar por el calculista. Cotas en metros.

https://ezeader.myportfolio.com/ezequiel-ader

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

No.	Description	Date

Angel Luis Brusca

CASA ANGEL

CUB-P-02

Project number	0001
Date	18 de Agosto, 2025
Drawn by	Author
Checked by	Checker

Cubierta · P-02

Scale 1 : 75

10/26/2026 9:59:43 AM