
CASA ÁNGEL · ESTRUCTURA · ALZADOS · 02. PLANTA ENTREPISO · 2/2

Alzados de muros y encadenados · MH-PE-07, MH-PE-08, MH-PE-09, MH-PE-10, VE-PE-01

MH-PE-07 · alzado 1:30


Sector: 02. Planta Entrepiso

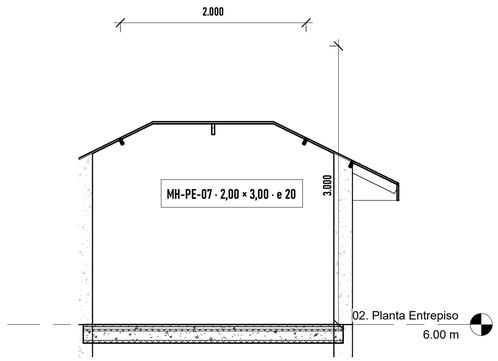

MH-PE-07 · 2,00 × 3,00 · e 20
Hormigón armado (tipo Muro Hormigón 20cm)

MH-PE-08 · alzado 1:30


Sector: 02. Planta Entrepiso

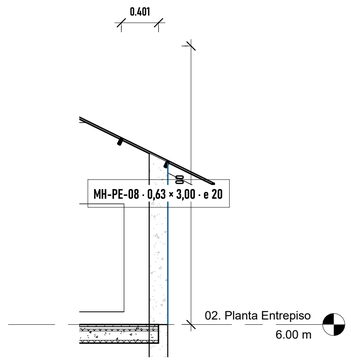

MH-PE-08 · 0,63 × 3,00 · e 20
Hormigón armado (tipo Muro Hormigón 20cm)

MH-PE-09 · alzado 1:30


Sector: 02. Planta Entrepiso

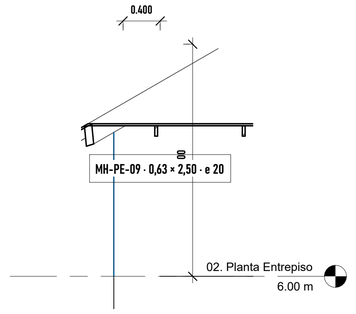

MH-PE-09 · 0,63 × 2,50 · e 20
Hormigón armado (tipo Muro Hormigón 20cm)

MH-PE-10 · alzado 1:30

Sector: 02. Planta Entrepiso

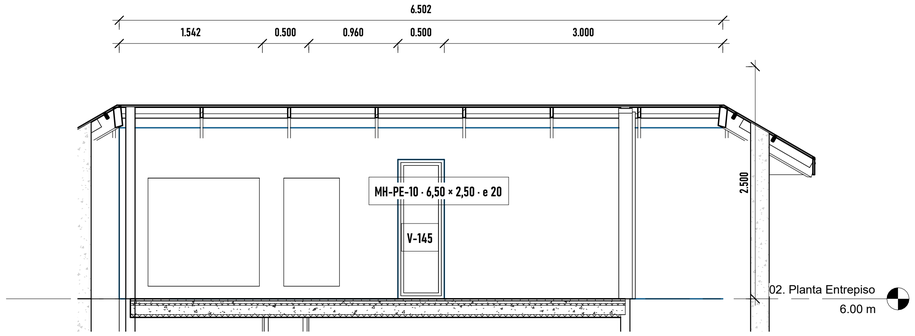


V-151

MH-PE-10 · 6,50 × 2,50 · e 20
Hormigón armado (tipo Muro Hormigón 20cm)

VE-PE-01 · alzado 1:30

Sector: 02. Planta Entrepiso

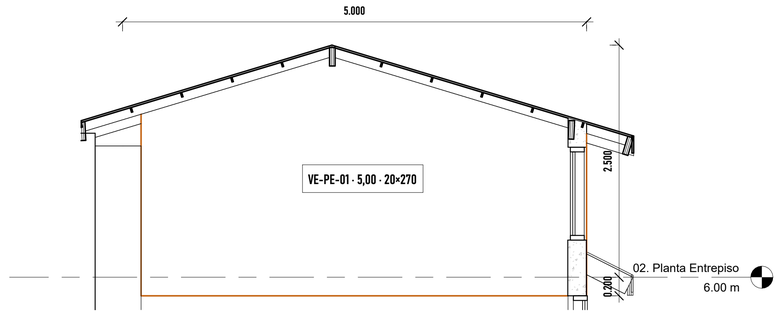

VE-PE-01 · 5,00 · 20×270
VIGA encuentro 2 techos, revestimiento fachada (modelado como muro)

Estructura: documentación sobre geometría nativa. Códigos MH/VE/LO/PL solo como anotación (no se escribieron en el modelo). Cotas en metros; largos y vanos anclados a extremos (no asociativos). Losas L01.00 de PA/PE: a confirmar.

https://ezeader.myportfolio.com/ezequiel-ader

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

Consultant
Address
Address
Phone
Fax
e-mail

No.	Description	Date

Angel Luis Brusca

CASA ANGEL

EST-SEC-PE-02

Project number	0001
Date	18 de Agosto, 2025
Drawn by	Author
Checked by	Checker

Estructura · SEC-PE-02

Scale 1 : 30

10/23/2025 11:11 PM